

Overview

WS- C2960-24TT-L is one of the Cisco Catalyst 2960 Series switches. Cisco Catalyst 2960 Series switches support voice, video, data, and highly secure access. They also deliver scalable management as your business needs change. The Common Features are included: Enhanced security including Cisco TrustSec for providing authentication, access control, and security policy administration, Multiple Fast or Gigabit Ethernet performance options, Cisco EnergyWise for power management, Scalable network management.

Quick Specs

Figure 1 shows the appearance of the Cisco WS-C2960-24TT-L switch and its accessories.

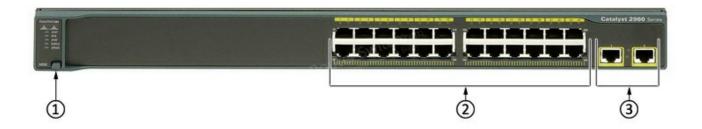


Table 1 shows the Quick Spec of the Cisco 2960-24TT-L switch.

Product Code	WS-C2960-24TT-L
Enclosure Type	Rack-mountable - 1U
Feature Set	LAN Base
Uplink Interfaces	2 x 10/100/1000 TX uplinks
Ports	24 x Ethernet 10/100 ports
Throughput	6.5 Mpps
Backplane Capacity	16 Gbps
DRAM	16 MB
Dimensions	1.73 x 17.5 x 9.3 in.
Package Weight	8.15 Kg

Product Details

Figure 2 shows the front panel of the Cisco 2960-24TT-L switch.



Note:

(1)	LED Area
(2)	24 x Ethernet 10/100 ports
(3)	2 x 10/100/1000 TX uplinks

Figure 3 shows the back panel of the Cisco 2960-24TT-L switch.



Note:

(1)	RJ45 Console Port	(3)	RPS Connector
(2)	Fan Exhaust	(4)	AC power connector

Compare to Similar Items

Table 2 shows the comparison of similar items.

Models	WS-C2960-24TT-L	WS-C2960-24TC-L
Ports	24 x Ethernet 10/100 ports	24 x Ethernet 10/100 ports
Uplinks	2 x 10/100/1000 TX uplinks	2 dual-purpose uplinks
Feature Set	LAN Base	LAN Base

Get more information

Do you have any question about the Cisco Catalyst C2960-24TT-L switch?

Contact us now via **Live Chat** or **sales@router-switch.com**.

Specification

	WS-C2960-24TT-L Specifications		
Туре	Fixed		
Topology	Ethernet (10/100BaseTX) Ethernet (10/100/1000BaseT)		
Maximum Port density	24 10/100 ports		
Uplinks	2 10/100/1000 ports		
Modular/Expansion Slots	n/a		
Architecture	Layer 2 Switching (basic connectivity), Layer 2 Switching (intelligent services), Voice Enabled		
Form Factor	Fixed, Rack Mountable, Standalone/Clustering		
Dimensions	1.73 x 17.5 x 9.3 in.		
DRAM	16 MB		
	Features		
Specialized Service Modules	n/a		
	Security		
DHCP Snooping			
Dynamic ARP Inspection			
IP Source Guard			
RP Rate Limiters			
TCP Intercept			
802.1x			
Port Security			
Dynamic VLANs			
Private VLANs			
Private VLAN Edge			
Secure Shell			
SNMPv3			
Unicast RPF			
ACLs (L2-L4)			
Kerberos			
TACACS+			
RADIUS			
High Availability/Resilliency			
Hardware Redundancy	External Redundant Power Supply		

High Availability/Resilliency	PVST, Broadcast Suppression, Unicast Suppression, Mulitcast Suppression, Spanning Tree, Portfast, Uplink Fast, Backbone Fast, 802.1s, 802.1w	
Management		
Management features	SPAN, RSPAN, CiscoView, Cisco Discover Protocol (CDP), Virtual Trunking Protocol (VTP), Telnet Client, BOOTP, TFTP, CiscoWorks, CWSI, RMON, SNMP, Clustering, Web-Based Management	
Scalability		
WAN Interface Support	n/a	
Throughput	6.5 Mpps	
Backplane Capacity	16 Gbps	
Number of VLANs	255	

https://www.cisco-shabake.com/

021-88313895